

# FOLIANT VEGA 530 SF

The FOLIANT Vega 530 SF is a very compact industrial laminating machine, designed for a heavy-duty lamination of digital and offset outputs (max. format 20" x 30"). It is equipped with an integrated deep pile suction feeder (original from offset printing machines), pneumatic high-speed bump separator, adjustable dual decurl bar and overlap system. Due to its high pneumatic pressure system, format and performance the machine is suitable for all jobs – all kinds of digital printed sheets and high volumes of offset printed sheets size 19.7" x 27.8" for lamination. **The machine maximum speed is up to 65'/min.**, while performance is almost 1,720 sheets per hour of 19.7" x 27.8" portrait or 3,000 sheets 14" x 20" landscape (blank paper 200 gsm).



## FEEDER

The FOLIANT Vega 530 SF is equipped with a rising pile suction feeder. Its feeding head origin is in offset printing machines. The Becker vacuum pump integrated in the machine frame is used for sheets front airing. The overlaps are controlled, in an "in-run" mode. The accuracy is +/- .78" under-lap (in a constant speed). The feeder is fitted with a lifting plate and its capacity is a 11" pile of paper.

## LAMINATOR

The FOLIANT Vega 530A laminator maximum sheet size is 20" x 30". The minimum sheet size is 7.8" x 11.8" (A4). The FOLIANT Vega 530A machine is a single-sided thermal industrial laminator, laminating the 115 – 500 gsm paper.

The machine needs an external source of pressured air for the pneumatic pressure system 87.0 psi - 116.0 psi / 5.3 cfm.

The laminating unit is equipped with an adjustable dual decurl bar, in-run adjustable:

- With a decurl blade for offset printed sheets decurling
- With a decurl roller for digital printed sheets decurling (to prevent the scratches on sheets printed on both sides by digital print with a higher level of sensitive toners).

The whole machine is controlled with an interactive, easy understandable icon based touch screen and its used control system includes many automation items for an easy control of the machine and a reliable lamination.

**More automation:** Comparing competitive products Vega 530 SF machine's control system allows more automation like:

- Intelligent interruption of jobs, without any machine's re-installation or re-adjustment, it saves plenty of time
- First sheets of a new job automatic passing through the gap between master rollers, to the best position. It makes it safety and easy.
- Automatic regeneration of master pressure.

The roll of a film is mounted on a quick-changed shaft with a film tension control breaker. The shaft capacity is up to 3,000 m of the 24 - 42 microns film. Standard core diameter: 3". The film holder unit is equipped with an in-line trim slit and a perforating wheel. The laminating process is made between two laminating rollers - a highly polished chrome roller, and a lower hard rubber pressure roller. The pressure is pneumatically adjustable. The laminating roller is heated with a dry electric system inside the roller, with a sensitive temperature sensor. The warm up time is shorter than 8 minutes.

## SEPARATOR

The integrated pneumatic bump separator (sheeter) is equipped with a pair of fast cycling rollers. The process is controlled from the machine control unit. The separated sheets are delivered into a vibrating jogger (optional) or adjustable reception unit (optional).

## LAMINATING FILMS

The machine laminates the BOPP films (24 – 42 µm) and Nylon films (24 – 35 µm).

## OPTIONS

### JOGGER 530\*

It is an adjustable vibrating reception unit for the laminated sheets stocking. Its capacity is limited up to a 3.9" pile of sheets.

### RECEPTION UNIT 530\*

It is an adjustable desk for laminated sheets stocking. Its capacity is 3.9" pile of sheets.

### FOLIANT FOILER

That system allows to stick (over digital printed toners) following foils:

- metalized foils (available in many designs like gold, silver, red etc.) and holographic foils
- transparent glossy foil for spot varnishing effect.

### NON-STICKY PRESSURE ROLLER

It is a revolution in laminating technology – the standard rubber pressure roller is replaced by roller with non-sticky surface. It absolutely does not stick the glue. Film, inks and paper. Cleaning of this roller is not necessary at all. Allows lamination of sheets with windows.

### EXTRA FILM SUPPLY ROLL SHAFT

Additional Film Supply Roll Shaft for quicker film replacement, film core 3" and 1".

### AIR SHAFT

Standard film holder is replaced with air shaft for quick, tool-less film installation, film core 3" only.

### XXL FEEDING TABLE EXTENSION

Removable feeding table extension that is able to support paper up to 51" long.


### ANTI-STATIC BAR

Pair of ionization bars that remove static charge from laminated paper.

\*Important – the machine must be operated either with Reception unit or with Jogger.



Optional Jogger 530

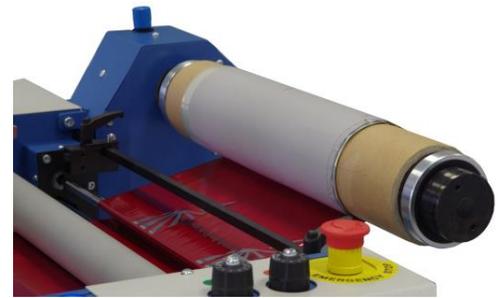

Optional Foliant Foiler

Foliant Vega 530 SF			
Max speed	65' / min	Warming up time	8 min
Max. performance	1,720 14" x 20" / hour	Temperature control	176° - 284°F
Feeding	Automatic	Power supply	3 ph., 3x400 V AC, 50-60 Hz
Feeding system	Suction feeding head	Power	5,000 W
Feeder's load capacity	11"	Floor space with Jogger (w x l)	39.3" x 84.6"
Overlaps	In-Run Adjustable	Weight	882 lbs
Overlaps accuracy	+ / - .78"	Dual de-curl bar, In-run adjustable	Standard
Separation	Automatic, Bump Rollers	Jogger 530	Optional
Paper weight	115 - 500 gsm	Reception Unit RU530	Optional
Main rollers pressure	Pneumatic	Non-sticky pressure roller	Optional
External compressor	87 - 116 psi / 5.3 cfm	Pneumatic separation	Standard
Min. sheets size (w x l)	7.8" x 11.8"	Air shaft	Optional
Max. sheets (w x l)	20" x 30"	Foliant Foiler	Optional

The information in this document is subject to change without notice and should not be construed as a commitment by Foliant EU. Foliant EU assumes no responsibility for any errors that may appear in this document.